


CF 碳膜電阻器 CARBON FILM RESISTOR


DIMENSION

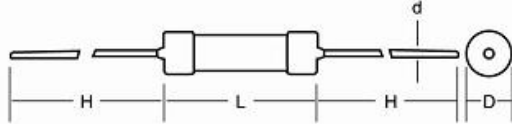

NOTES:

Too low or too high resistance value can be supplied by request.

DERATING CURVE

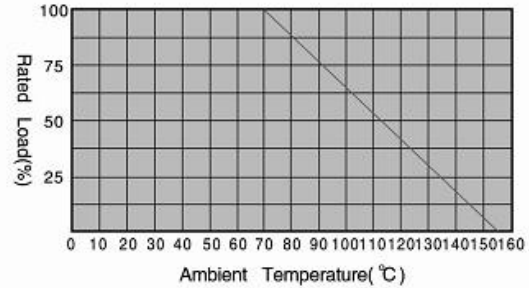

SPECIFICATIONS

額定電力 POWER RATING	最高使用電壓 MAXIMUM WORKING VOLTAGE	最高過負荷電壓 MAXIMUM OVERLOAD VOLTAGE	DIMENSIONS(mm)				阻值範圍 RESISTANCE RANGE
			L	D	H	d±0.05	
1/6W, 1/8W	200V	400V	3.2±0.2	1.8±0.2	28±2.0	0.40	STANDARD 1Ω-10MΩ
1/4WS	250V	500V	3.2±0.2	1.8±0.2	28±2.0	0.40	
1/4W	250V	500V	6.0±0.5	2.3±0.5	28±2.0	0.45	
1/2WS	350V	700V	6.0±0.5	2.3±0.5	28±2.0	0.45	
1/2W	350V	700V	9.0±0.5	3.2±0.5	26±2.0	0.52	
1WS	500V	1000V	9.0±0.5	3.2±0.5	26±2.0	0.52	
1W	500V	1000V	11.0±1.0	3.7±0.5	35±2.0	0.65	
1W	500V	1000V	11.0±1.0	4.2±0.5	25±2.0	0.65	
2WS	500V	1000V	11.0±1.0	4.2±0.5	35±3.0	0.65	
2W	500V	1000V	15.0±1.0	5.0±0.5	33±3.0	0.72	
3W	500V	1000V	17.0±1.0	6.0±0.5	38±3.0	0.72	

ELECTRICAL PERFORMANCE

Test Items	Condition	Spec			
Short Time Overload	2.5 times of RCWV for 5 secs.	±(2%+0.05 Ω)			
Load life	70°C at rated power 1.5hrs on;0.5 hr off for 1000hrs	±(5%+0.05 Ω)			
Dielectric Withstanding Voltage	Max Overload Voltage 1 Minute	±(0.5%+0.05 Ω)			
Temp. Cycling	-30°C / +85°C for 5 cycles	±(1%+0.05 Ω)			
Insulation Resistance	D.C. 500V	1000MΩ			
Moisture-proof Load Life	40°C 95% RH 1.5hrs on / 0.5hr off cycle for 1000 hrs.	±(5%+0.05 Ω)			
Soldering Heat Resistance	350°C for 3.5 secs.	±(2%+0.05 Ω)			
ppm / °C Temp. Coeff.	T.C.	±450			
	TYPE	-150~-700			
	TYPE	-150~-1000			
	1/6W · 1/8W	<47K Ω	51KΩ-100KΩ	110KΩ-330KΩ	-150~-1300
	1/4W & OVER	<100KΩ	110KΩ-1MΩ	1.1MΩ-2.2MΩ	Over 2.4MΩ

*RCWV" Rated Continuous Working Voltage